



User's Manual Meade Astro-Cube Dew Annihilator (Models MD-A)



MDA unit can be purchased with various colors or in basic black

Copyright June 10 2020

User's Manual
for the
Astro-Smart
Astro-Cube Dew Annihilator
(Models M-DA)

Contents

A.	Overview	2
B.	Features	4
C.	Base Package Contents	5
D.	Input / Output Power Specifications	6
E.	M-DA Front Panel And Connector Diagram.....	7
F.	Basic Functionality	7
G.	Accessories.....	8
H.	Warranty, Policies, Copyright Notice:.....	9



Providing the Astronomical Community with
Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

Astro-Cube Dew Annihilator (Model M-DA)

A. Overview

The M-DA can be setup with your telescope for trouble-free operation controlled manually by the dialed in heat intensity knob. Astro-Smart is the innovator of this elegant *solution to your dew problem*. The **Astro-Cube Dew Annihilator (Model: M-DA)** is designed for Astronomers and Astrophotography's who want a low cost, small compact yet powerful dew heater controller that can be put in your pocket ready to grab and go yet at the same time be able to perform just as well as an observatory grade dew controller.

The Astro-Cube dew Annihilator can be used with Astro-Smart's RCA jack type dew straps or compatible RCA type straps such as Astro-Zap and Kendrick. **The Astro-Cube Dew Annihilator (Model: M-DA)** is designed to be used with any make or model of telescope. Whether you have a refractor, Newtonian, Schmidt Cassegrain, or a Ritchey-Chretien, the **M-DA** will solve your dew problems while informing you every step of the way. Its like having a hired dew specialist posted at your telescope 24/7.

The **Astro-Cube Dew Annihilator (Model: M-DA)** systems incorporates a common two port heater capability controlling up to 2 heat channels controlled using a rotary dial with a visual indicator LED to display the PWM intensity rate applied to the heat channels. The **Astro-Cube Dew Annihilator (Model: M-DA)** is powered by a 12VDC input from car adapter or AC/DC power supply available at Astro-Smart which can drive up to 10Amps rated dew straps.

For instance, one channel CH1 heater may be used for the main imaging telescopes secondary corrector plate for dew control while CH2 heater can be used for the primary mirror, another mounted imaging scope, guider or finder scope or your eyepieces.



Providing the Astronomical Community with Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

In the following picture you can see **M-DA** system with common 2 heat channels, PWM LED intensity indicators on CH1 and CH2 and option for temperature and humidity monitoring.



MDA unit can be purchased with various colors or in basic black

Astro-Cube Dew Annihilator (M-DA)

Typical Configuration for the MDA is shown below on a ritchey-chretien but can be used with any reflector, refractor, newtonian or schmidt-cassegrain telescope and temperature and humidity monitoring.





Providing the Astronomical Community with
Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

B. Features

Since, the inception of this unique product at Astro-Smart, the **M-DA** was many years in the making, over long periods in astronomy using existing products on the market to control dew, identifying their weaknesses and limitations making the product you see before you. The **M-DA** is finally here!!! The Astro-Smart **Astro-Cube Dew Annihilator (Model M-DA)** is designed to be user friendly, serviceable, elegant and reliable and include the following features shown below:

1. ***Worry Free Warranty Program for Life Of Product Sale.***
2. ***Full Manually Operated Rotary Dial Dew Control Solution.***
3. ***2 Output Port Heat Channels User Control Capable of 120 Watts (12V, 15Amps). Works with Any RCA type heat strap.... Astro-Zap, RCA type dew strap such as Astro-Smart, Kendrick, etc.***
4. ***Variable Rotary Dial Power Control PWM Duty Cycle 0-100% @ 50 KHz Power Intensity.***
5. ***PWM LED Flash Intensity Indicator for Heat PWM Output Ports.***
6. ***Dimensions (2.3" Long x 2.5" Wide x 1.3" High.)***
7. ***Temperature and Humidity Monitoring Of Optics Option (4 Sensors)***
8. ***4 X Mounting Brackets Top and Bottom Provided as Part Of Package Design.***
9. ***High quality design employs multi-layer PCB form factor and only the best quality components with conformal coatings for outdoor use.***
10. ***Void of RFI (Radio Frequency Interference) protected to enhance Astro-Imaging .***
11. ***Price point set below development cost for such a system while providing more features.***

The Astro-Smart Astro-Cube Dew Annihilator (**M-DA**) was designed with the same Astro-Smart User-Friendly design philosophy as all our other products:

- Usable
- Serviceable
- Elegant
- Reliable
- Build with burn in time testing before ship.



Providing the Astronomical Community with
Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

C. Base Package Contents

The package contents are shown below. Other accessories available described in later chapter:

- 1. MDA Family Dew Controller System*** (In Colors or Black)
- 2. 12 Volt fused cigarette adapter harness.***





Providing the Astronomical Community with Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

D. Input / Output Power Specifications

The Meade **M-DA** requires the following:

- At a minimum of 12 Volts DC at 3.3 amps a 2.5mm DC power connector on your AC/DC supply. Based on the 4 channel configuration, the **M-DA** is rated at 5 Amps per duplexed channel or 10 Amps total. Ie. Ch1-2 5 Amp max + Ch3-4 5 Amp max for a total of 10 Amps at 12 VDC which gives a variety of heat strap configurations possible. A power supply rated at 12 VDC and 10 Amps rms is the ideal configuration which astro-smart recommends and provides as a purchase option

Note: This current drawn through the **M-DA** is dependent on the resistance of each dew strap being used with the **M-DA** . The total current for all the dew straps must not exceed the power supply current rating.

The total resistance of all the dew straps used with the iDDHM must follow this equation for SAFE operation:

$$\frac{\text{Current Rating of Power Supply}}{\text{Voltage output of Power Supply}} = \frac{1}{R_{\text{strap 1}}} + \frac{1}{R_{\text{strap 2}}} + \frac{1}{R_{\text{strap 3}}} + \frac{1}{R_{\text{strap 4}}}$$

Astro-Smart assumes no responsibility if this warning is not heeded.

- Center positive voltage, sleeve ground, sees Figure 1.




Figure 1 DC power plug

- Uses dew straps manufactured by Astro-Smart and other astronomical vendors.
- **Note:** Astro-Smart recommends you buy our certified tested power supplies for this product. Users can buy and connect their own power supplies to this product, but they do so at their own risk.



Providing the Astronomical Community with
Premier Products and Services


Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

E. M-DA Front Panel And Connector Diagram

- **Astro-Cube Dew Annihilator (Model M-DA) Configuration .**

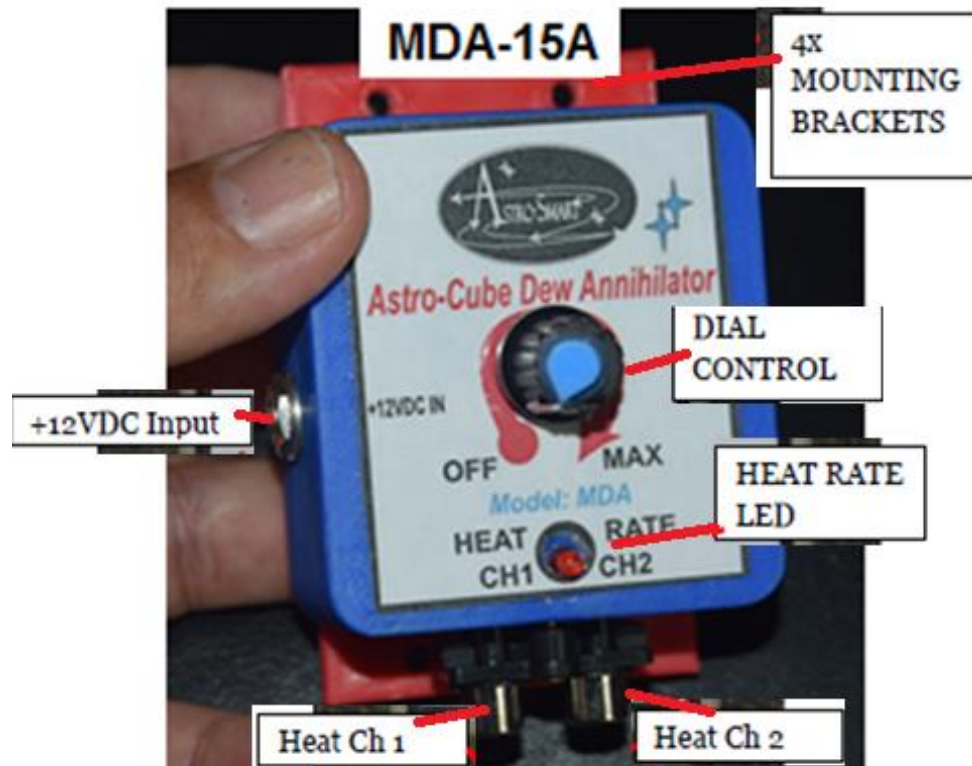

F. Basic Functionality

The user can watch as the **M-DA** adjusts heat and controls dew on your telescope based on user input on rotary dial for simplicity.

Online video demo's of operation can be found on our website at :

http://www.astro-smart.com/index.php?p=1_24



Providing the Astronomical Community with Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

G. Accessories

Optional Accessories:



Another convenient accessory that Astro-Smart offers for your **MDA is the Temperature and Humidity option which** has 4 sensors including internal ambient temperature/humidity to unit and an additional 2 probed temperature and humidity sensors for your optics. This economical solution makes your MDA-4A or MDA-4 have the capability to monitor readings of your optics with large display and three button controls for Celsius/Fahrenheit degree display, Min/Max sensor reading search and IN/OUT button to read internal vs. probed sensor inputs on your optics. Requires a 1.5V AAA battery for simple operation.



Another convenient accessory that Astro-Smart offers is a right angle heater connector ([RAHC-DM](#)). This allows your heater to be connected to the **M-DA** at a right angle. This may be convenient for you to alleviate any bending that you have of your heater connector and wire.



Another convenient accessory for your **M-DA** that Astro-Smart offers is Two versions of power supplies based on your dew heating needs for 6 Amp or 10Amp 12 VDC supplies([PS12VXAMP-D](#)).



Another product Astro-Smart offer is our Premium Dew Heater Straps. Astro-Smart is proud to announce the offering of our Premium Dew Controller straps that can be used with the Astro-Smart Dew Controller products and compatible with other vendor dew controllers with RCA jack input to control temperature of your telescope optics, cameras, camera lens, telescope eyepieces and sensitive electronics. The materials used for these Premium Dew Straps include Industrial Velcro, High Quality Insulating Material to project heat toward the optics and away from the atmosphere, 5 foot power cord with male RCA connector and Power Conductor Current capable of 10 Amps.



Providing the Astronomical Community with
Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

H. Warranty, Policies, Copyright Notice:

Lifetime Warranty

All products are guaranteed to the original purchaser to be free from defects in material and workmanship for the life of the product from the date of original purchase. Simply put, once you buy a Astro-Smart product we make sure it works for as long as you keep the product for free upgrades of software and firmware for the product. Warranty coverage excludes normal wear and tear, or damage caused by improper installation, any modification, abuse, misuse, improper maintenance, and unauthorized repairs or modifications to the original product. Shipper is responsible for proper packaging, shipping and insurance on applicable upgrades or repair items. . Upon receipt of returned product, Astro-Smart will assess the item/s to determine if they comply with the conditions of our warranty. Astro-Smart is not responsible for damage caused by the freight carrier, i.e.: USPS, UPS, FED EX, etc., to our product. A claim to repair or replace the product must be initiated by the recipient. In no event shall Astro-Smart be liable for any claim for incidental or consequential damage arising out of or in connection, manufacture, delivery or use of any product offered on this website or by information received by US mail, E-mail, data files or fax.

Return Policy

Merchandise must be returned in new (mint) condition within 30 days of receipt for exchange/refund which may be subject to 20% restocking charge (Shipper is responsible for proper packaging, shipping, and insurance.). We must receive the returned merchandise within 30 days of the date you received it. All items must be in new (mint) condition when returned and fully functional. Returned items cannot show evidence of use or wear, dirt, or blemishes of any kind. Merchandise must be returned in its original packaging and should include all supplied materials, instructions, original accessories, hardware, and any CD software disks provided. Software purchases via email or download since released are non-refundable. Astro-Smart is not responsible for lost or damaged packages. Return shipping costs are the responsibility of the customer. Any returned items must be in "as new" condition. We ask that you open and inspect your order upon receipt. No insurance or damage claims will be accepted more than 3 days after delivery. All customers MUST email Astro-Smart



Providing the Astronomical Community with
Premier Products and Services

Astro-smart.com

Copyright © 2010-2048, All rights reserved

June 2020

before returning products for warranty or repair to get an RMA#(Return Merchandise Authorization).

Copyright Notice

All Astro-Smart products are protected by U.S. and International Copyright laws. Unauthorized use, duplication, distribution or reproduction of any intellectual property including concepts, ideas or applications of these products are prohibited and are subject to International and U.S laws governing export and re-exporting owned by Astro-Smart
Copyright © 2010-2018, All rights reserved.